

DURAPAC PAMH & PEMH | SERIES

WWW.DURAPAC.COM

BOLT TENSIONING POWER UNITS

E

BOLTING SOLUTIONS

ELECTRIC MOTOR

0.5 kW/220 volt 50-60 Hz
universal motor 6.0 amps

LIQUID FILLED PRESSURE GAUGE

range is 0-2,500 bar / 0-35,000 psi

ADJUSTABLE TORQUE CONTROL

for accurate torque settings

PRESSURE RELEASE LEVER

OIL OUTLET

fitted with a 1/4" DBT116M
quick release nipple

2.8M REMOTE PENDANT

through a 24 volt transformer
for safety. Incorporates
motor ON/OFF button



POWER REQUIREMENT

Electric 220 Volt 50-60 Hz (two speed pump)

AIR REQUIREMENT

Air 793 Lpm @ 7 bar (single speed pump)

MAXIMUM OPERATING PRESSURE



1,500 bar

SIGHT GLASS

incorporating a
temperature gauge

RESERVOIR

capacity 4L

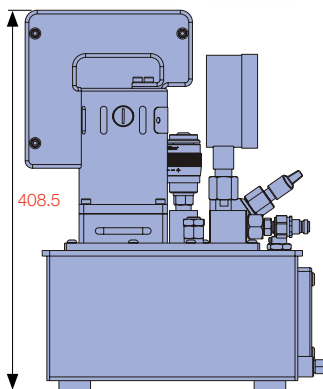

| Model Number | kW | Voltage | Hz | Amps | Usable oil Capacity (L) | Maximum Pressure Rating (bar) | Flow Rate (Lpm) | | Remote Pendant Function 2.8 mtr | Weight (kg) |
|--------------|------|---------|-------|------|-------------------------|-------------------------------|-----------------|-----------|---------------------------------|-------------|
| | | | | | | | 30 bar | 1,500 bar | | |
| PEMH0543 | 0.50 | 220 | 50/60 | 6 | 4 | 1,500 | 2 | 0.13 | ON/OFF | 24 |