



SPECIALISED FORCE
HYDRAULIC TOOLS & PTY. LTD.
ELECTRICAL CONTRACTORS EQUIPMENT

EXCLUSIVE DISTRIBUTOR OF

alkitronic®

HOME OF TORQUE POWER



CLV SERIES



Applications

- Pneumatic torque multipliers for torques up to 3,460 Nm.
- Multiple fastening connections and series assembly in semi-automatic operations.
- Perfect for bolted applications in hazardous, explosive environments.

Advantages

- Permanently higher joint quality (compared to impact and hydraulic wrenches) by continuous rotation of the square drive.
- Concurrent, even bolted connection, crosswise with several alkitronic® CLV torque multipliers.
- Comfortable remote control for right-left rotation.
- Low noise emission by integrated muffling.

alkitronic® Specials


- Universal valve block for pneumatic steering according to specific requirements.
- Robust pneumatic drive with sophisticated high-performance gear, reliably used around the world .
- alkitronic® CLV remote systems for one to four CLV torque multipliers.
- alkitronic® exhaust system for a workplace without air swirls (optional).



alkitronic® CLV Remote Systems

Chart:
FBL DUO for two CLV torque multipliers


The FBL QUATTRO version for four CLV torque multipliers more details on request.

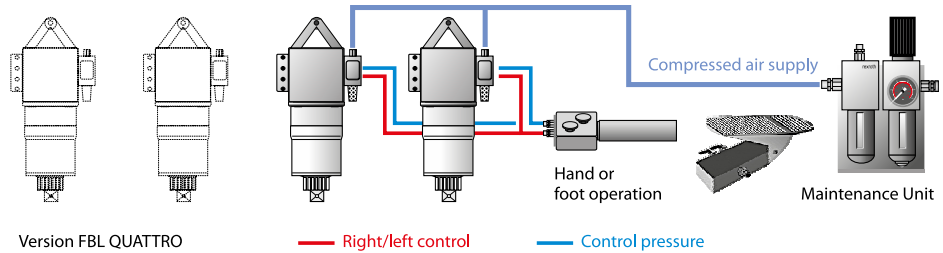

Models CLV


Type	CLV 15	CLV 25	CLV 35	CLV 45	CLV 75	CLV 95	CLV 135	CLV 175	CLV 255	CLV 315
Torque range (approx.) * Nm	60-220	90-280	130-400	160-500	300-900	360-1100	490-1450	650-1900	900-2700	1200-3500
Square drive B	1/2" / 3/4"	1/2" / 3/4"	3/4"	3/4"	3/4"	3/4"	1"	1"	1"	1"
Diameter (approx.) D1 mm	41	41	41	41	41	41	54	54	54	54
Height (approx.) L mm	296	296	296	296	318	318	320	340	372	372
Weight without DMA (approx.) kg	5.5	5.5	6	6	6.5	6.5	6.5	6.5	7	7
Idle speed rpm	60	38	34	27	19	13	9	7	6	4
Idle speedrpm	60	38	34	27	19	13	9	7	6	4

Specifications

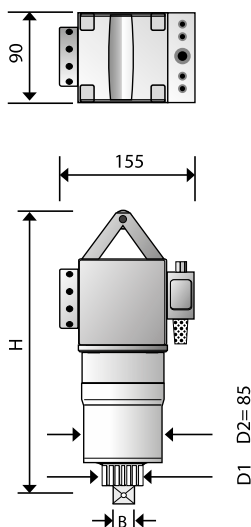

Prerequisites for best work with the indicated torques are an operating pressure of 2-7 bar at a volume flow of approx. 10-15 l/s. The torque accuracy depends on the stability of the supply system. The torque control of the pneumatic alkitronic® torque multiplier takes place via the air supply or pressure regulator of the Maintenance Unit.

Accessories:
Maintenance Unit, complete with filter, regulator, oiler and 5m hose, incl. couplings.



alki TECHNIK GmbH reserves the right to change specifications without prior notice



alkitronic® CLV operating in a preassembly and final assembly workstation. Remote controlled continuous tightening in semiautomatic operation.

PNEUMATIC SERIES

www.specialisedforce.com.au