



# DP 251 ATEX

Square drive	1"
Bolt range	M18-M39
Max torque	3300 Nm - 2440ft-lb
Working torque	700-1600 Nm - 510-1160 ft-lb
Free speed	3100 rpm
Impacts number	780/min
Working pressure	6,3 bar - 91 psi
Air inlet	1/2" BSP
Inner hose diameter	13 mm - 0.512 in
Length	271 mm - 10.67 in
Side to center	57.5 mm - 2.26 in
Vibration level - triaxial	4,8 m/s <sup>2</sup>
Sound pressure level	100 dB(A)



## INCLUDED IN THE BOX



The package contains: lifting eye bolt, handle (in compliance with the CE UNI EN ISO 11148-6 norm), oil for impact wrench motors, operating and maintenance manual, after-sales suggestions.

## MAIN FEATURES

- Hammer mechanism: 3-jaw
- Anvil type: with ring, with hole
- Air exhaust direction: through the handle
- Hammer mechanism lubrication: grease

## BEST FOR

- Mine and oil field
- Construction site and shipyard
- Industrial assembly
- Offshore platforms

## Upgraded 3-jaw hammer mechanism


## Increased weight/power ratio

## Air exhaust through the handle

- less noise
- no harmful dust

## Certified paint

Air inlet with phosphate manganese coating treatment

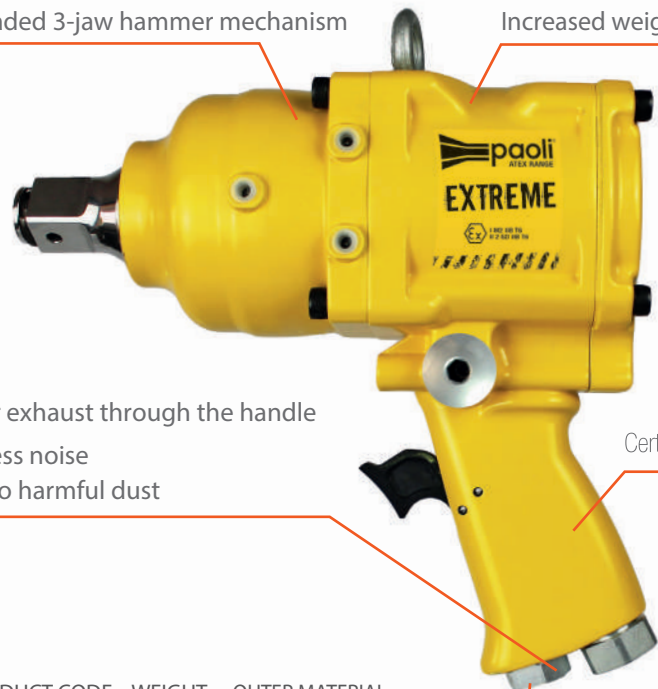

AVAILABLE MODELS	PRODUCT CODE	WEIGHT	OUTER MATERIAL
I M2 IIB T6 II 2 GD IIB T6	A.07.21.0002	12 kg 26.4 lbs	Zama
II 2 GD IIB T6 II 3 G IIB T6	A.07.21.0003	9,1 kg 20 lbs	Aluminium

**paoli**

**SF SPECIALISED FORCE**  
HYDRAULIC TOOLS & ELECTRICAL CONTRACTORS EQUIPMENT  
PTY. LTD.

[specialisedforce.com.au](http://specialisedforce.com.au)