



DP 256 BG ATEX

Square drive	1"
Bolt range	M18-M39
Max torque	3200 Nm - 2360 ft-lb
Working torque	600-1700 Nm - 450-1240 ft-lb
Free speed	3200 rpm
Impacts number	750/min
Working pressure	6,3 bar - 91 psi
Air inlet	1/2" BSP
Inner hose diameter	13 mm - 0.512 in
Length	357 mm - 14.05 in
Side to center	56 mm - 2.20 in
Vibration level - triaxial	4,9 m/s ²
Sound pressure level	101 dB(A)




INCLUDED IN THE BOX



The package contains: lifting eye bolt, handle (in compliance with the CE UNI EN ISO 11148-6 norm), oil for impact wrench motors, operating and maintenance manual, after-sales suggestions.

MAIN FEATURES

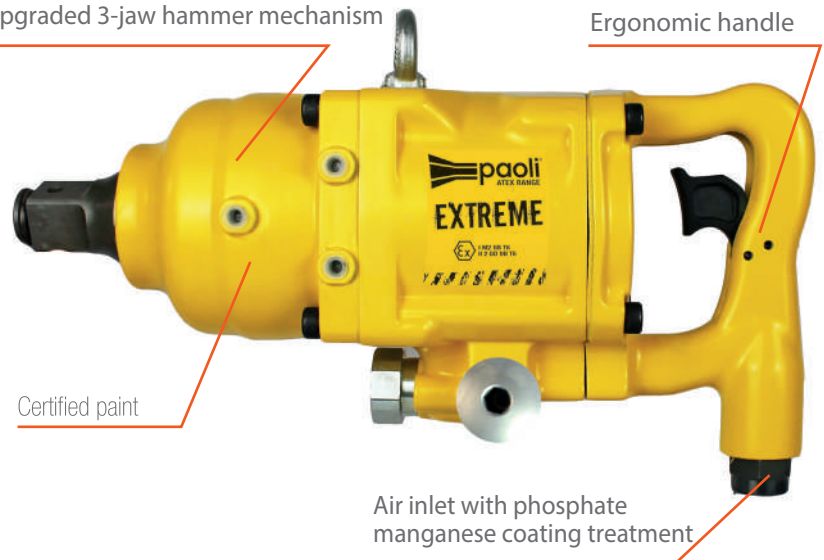
-  Hammer mechanism: 3-jaw
-  Anvil type: with ring, with hole
-  Air exhaust direction: frontal
-  Hammer mechanism lubrication: grease

BEST FOR

-  Mine and oil field
-  Construction site and shipyard
-  Industrial assembly
-  Offshore platforms



Upgraded 3-jaw hammer mechanism

Ergonomic handle



Certified paint

Air inlet with phosphate manganese coating treatment

AVAILABLE MODELS	PRODUCT CODE	WEIGHT	OUTER MATERIAL
 I M2 IIB T6 II 2 GD IIB T6	A.07.31.0002	12,1 kg 26.67 lbs	Zama
 II 2 GD IIB T6 II 3 G IIB T6	A.07.31.0003	9,48 kg 20.90 lbs	Aluminium



specialisedforce.com.au