

DP 362 BG ATEX

Square drive	1" 1/2
Bolt range	M24-M56
Max torque	4200 Nm - 3100 ft-lb
Working torque	1200-2950 Nm - 880-2180 ft-lb
Free speed	3200 rpm
Impacts number	650/min
Working pressure	6,3 bar - 91 psi
Air inlet	1/2" BSP
Inner hose diameter	13 mm - 0.512 in
Length	421 mm - 16.6 in
Side to center	60 mm - 2.36 in
Vibration level - triaxial	12,3 m/s ²
Sound pressure level	104 dB(A)




INCLUDED IN THE BOX



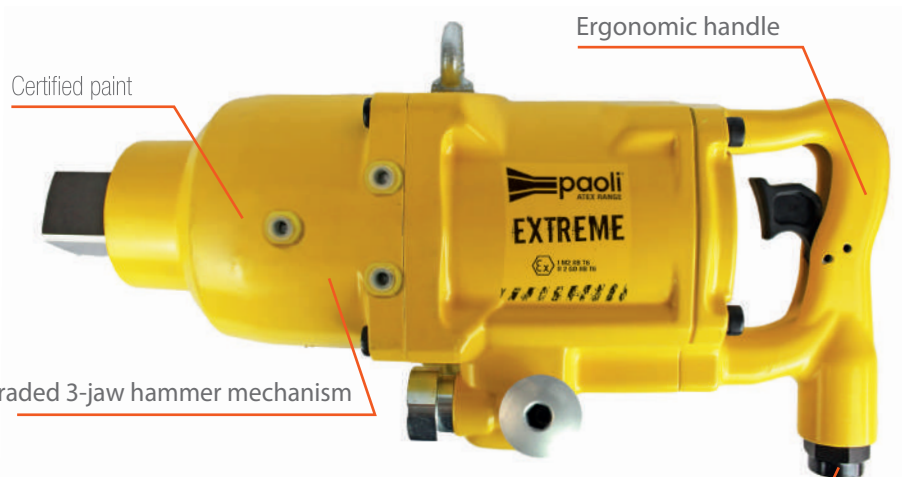
The package contains: lifting eye bolt, handle (in compliance with the CE UNI EN ISO 11148-6 norm), oil for impact wrench motors, operating and maintenance manual, after-sales suggestions.



MAIN FEATURES

-  Hammer mechanism: 3-jaw
-  Anvil type: with ring, with hole
-  Air exhaust direction: frontal
-  Hammer mechanism lubrication: grease

BEST FOR

-  Mine and oil field
-  Construction site and shipyard
-  Industrial assembly
-  Offshore platforms



AVAILABLE MODELS	PRODUCT CODE	WEIGHT	OUTER MATERIAL
 I M2 IIB T6 II 2 GD IIB T6	A.07.41.0002	17,8 kg 39.2 lbs	Zama
 II 2 GD IIB T6 II 3 G IIB T6	A.07.41.0003	14,5 kg 32 lbs	Aluminium