

F/308 HS F/308

Universal telescopic shaft

Special
versions
available
upon
request


Maus Italia offers the universal **telescopic shafts** belonging to the **F/308 HS** and **F/308** series, facilitating the **effective transmission of rotational speed from the motor to the tube expander**:

- The brand-new **F/308 HS**, the technological evolution of **F/308** featuring new innovative design solutions, is recommended for use at speeds exceeding 400 revolutions/min (r.p.m.) due to its special dexterity, accuracy and stability. The **F/308** model, however, also allows the use of joints belonging to the old **F/316** and **F/315** series.
- The traditional **F/308**, which has been in production for many years, is now exclusively offered in the **F/308** version for heavy transmission.

F/308 HS

F/308 HS Code	N	Handle A		Telescopic range B		Extendability		Max. motor torque		Weight		∅M mm	Recommended joints Code
		mm	inches	mm	inches	mm	inches	Nm	Lb Ft	Kg	Lb		
F308HS-2	3	205	8.1	650÷1060	25.6÷41.7	410	16.1	70	51	5,4	11.90	12	F/314 HS, F/313
F308HS-3	3	225	8.9	650÷1060	25.6÷41.7	410	16.1	135	99	7,9	17.41	18	F/317 HS, F/316, F/315
* F308HS-3L	3	225	8.9	850÷1460	33.5÷57.5	610	24.0	135	99	8,9	19.62	18	F/317 HS, F/316, F/315

* Version with extra extendability for use with mandrels whose length exceeds 500 mm (19,7")

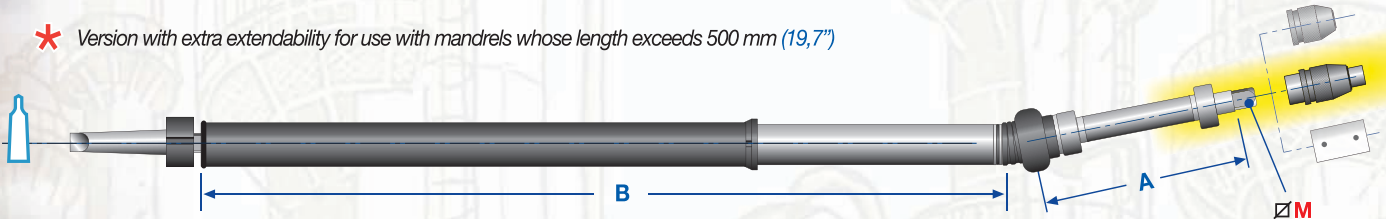

F/308

F/308 HS Code	N	Handle A		Telescopic range B		Extendability		Max. motor torque		Weight		∅M mm	Recommended joints Code
		mm	inches	mm	inches	mm	inches	Nm	Lb Ft	Kg	Lb		
F308-4	4	260	10.2	650÷1170	25.6÷461.7	520	205.1	1500	1106	16,5	36.37	24	F/318

