

POWERSTRESS

MONO STRAND STRESSING JACKS – FRONT GRIPPING



Powerstress Mono Strand Stressing Jacks are front gripping jacks suitable for 12.7 & 15.2mm strand.


- Easy to insert jack onto strand in constricted space
- Useful for removing slackness in long strands
- Used for rock bolting and post tensioning operations

FEATURES

- High quality jack with chrome piston, centre tube, bronze ram follower, bronze gland nut inlay and high quality seals
- Rear facing pressure and return ports 3/8 NPT Female
- Fitted with Cejn flat face snap couplers and aluminium dust caps
- Supplied with one set of wedges 12.7mm (15.2mm also available upon request)
- All spares available at reasonable price
- Factory tested to ISO 10100 specification with ISO 9001 traceability

SPECIFICATIONS

Model No.	Capacity (ton/kn)	Stroke	Working Pressure at Capacity	Effective Area (cm²)	Weight with Couplings (kg)
CH106DA-PRE	10 / 98	150	10T at 552 Bar	18.14	8.0

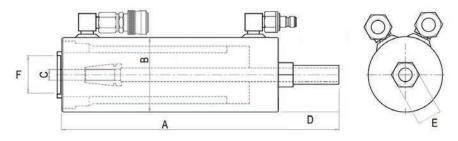

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
380	110	21	65	45	42

REPLACEMENT WEDGE SETS

Part No.	Description		
CH106-12.7	0.5" Wedges		
CH106-15.2	0.6" Wedges		

SYDNEY HEAD OFFICE

131 WOIDS AVENUE CARLTON NSW 2218 TEL: (02) 9547 1844 sales@specialisedforce.com.a

Perth

19 AUGUSTA STREET WILLETON WA 6155 TEL: (08) 9354 8544

Adelaide

316 SOUTH ROAD RICHMOND SA 5033 TEL: (08) 8352 8866

Port Hedland

4/13 CAJARINA ROAD

WEDGEFIELD WA 6721

TEL: (08) 9172 1113

Brisbane

2/68 NORTHLINK PLACE NORTHGATE QLD 4013 TEL: (07) 3256 6011

Darwin

4/17 WILLES ROAD BERRIMAH NT 0828 TEL: (08) 8984 4453

Townsville

2/1 CIVIL ROAD
GARBUTT QLD 4814
TEL: (07) 4728 8756

Hobart

22/370-380 CAMBRIDGE ROAD MORNINGTON TAS 7018 TEL: 0427 423 217



