

POWERSTRESS

MONO STRAND STRESSING JACKS – FRONT GRIPPING



Powerstress Mono Strand Stressing Jacks are front gripping jacks suitable for 12.7 & 15.2mm strand.

- Easy to insert jack onto strand in constricted space
- Useful for removing slackness in long strands

19 AUGUSTA STREET

WILLETON WA 6155

TEL: (08) 9354 8544

Used for rock bolting and post tensioning operations

FEATURES

- High quality jack with chrome piston, centre tube, bronze ram follower, bronze gland nut inlay and high guality seals
- Rear facing pressure and return ports 3/8 NPT Female
- Fitted with Cejn flat face snap couplers and aluminium dust caps
- Supplied with one set of wedges 12.7mm • (15.2mm also available upon request)
- All spares available at reasonable price •

22/370-380 CAMBRIDGE ROAD


MORNINGTON TAS 7018

TEL: 0427 423 217

Factory tested to ISO 10100 specification with ISO 9001 traceability

SPECIFICATIONS

Model No.	Capacity (ton/kn)	Stroke	Working Pressure at Capacity	Effective Area (cm ²)	Weight with Couplings (kg)	Weight w/o Coupling (kg)
CH106DA-PRE	10 / 98	150	10T at 552 Bar	18.14	8.3	7.85

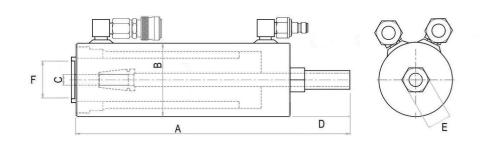

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
380	110	21	65	45	42

REPLACEMENT WEDGE SETS

Part No.	Description
CH106-12.7	0.5" Wedges
CH106-15.2	0.6" Wedges

4/17 WILLES ROAD

BERRIMAH NT 0828

TEL: (08) 8984 4453

BUTT QLD 4814 (07) 4728 8756 specialisedforce.com.au	KI TEL vicsales@
BUTT QLD 4814 (07) 4728 8756	KI TEL
	,
	_,
1 CIVIL ROAD	2/18 9
Townsville	
	Townsville 2/1 CIVIL ROAD

4/13 CAJARINA ROAD

WEDGEFIELD WA 6721

TEL: (08) 9172 1113

Melbourne SOUTHFORK DRIVE ILSYTH VIC 3137 EL: (03) 9761 4199