


**REMOTE CONTROLLED SAFETY
CUTTING SYSTEM**



Model No.
BP114-SAFETYCUT

Model No.
SMP-30AR-SAFETYCUT

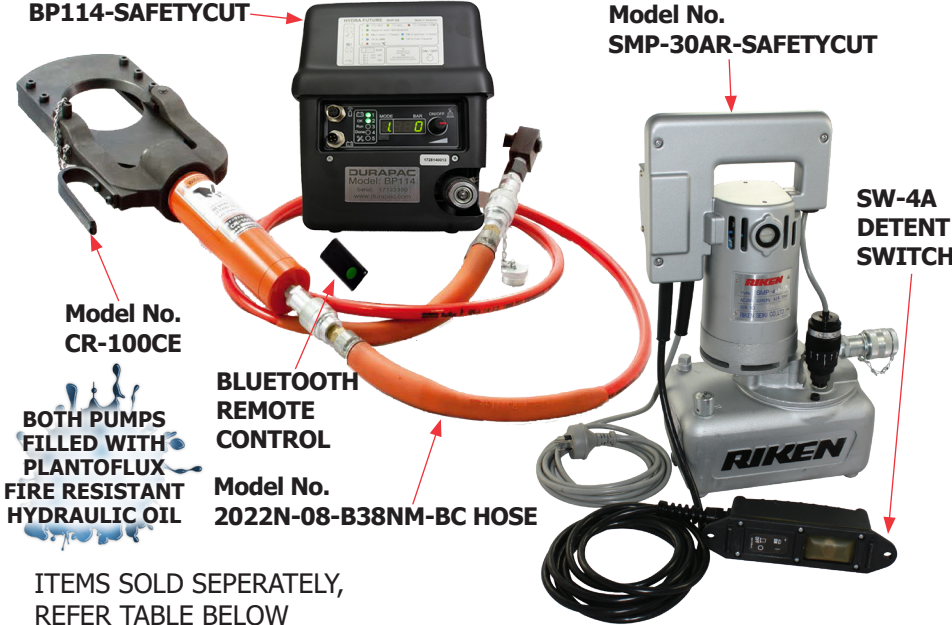

Model No.
CR-100CE

BLUETOOTH
REMOTE
CONTROL

Model No.
2022N-08-B38NM-BC HOSE

BOTH PUMPS
FILLED WITH
PLANTOFLUX
FIRE RESISTANT
HYDRAULIC OIL

SW-4A
DETENT
SWITCH

CR-100CE



CUTTING HEAD

FORCE
107kN
CAPACITY
100mm Blade Opening

PUMPS

PRESSURE
700Bar
RESERVOIR
1.2L & 2.0L
Weight
8.5kg & 14.5kg

HOSE LENGTH
8m

POWER SOURCE
Internal Battery & 230Volt

ITEMS SOLD SEPERATELY,
REFER TABLE BELOW

Model No.	Description
BP-114 - SAFETY CUT	Remote Battery pump with Cejn male coupler half. Tagged & filled with Plantoflux fire resistant hydraulic oil shown in picture above
SMP-30AR-SAFETY CUT	230V electric-hydraulic pump fitted with 10-115-6254 Cejn coupler, 10-115-4101 metal dust cap filled with PLANTOFLUX fire-resistant hydraulic oil and detent type remote hand switch.
CR-100CE	Remote hydraulic cable cutter with Cejn male coupler half. Cuts up to 100mm diameter steel wire armour cable
2022N-08-B38NM-BC	8m high pressure non-conductive hose assembly with Cejn female coupler half each end. Tagged & filled with Plantoflux fire resistant hydraulic oil shown in picture above
CR100EK	Earthing Kit shown below

SPECIFICATIONS

For safety cutting of cables (spiking) up to 100mmOD.

FEATURES

These cable cutting and spiking systems proves dead cables and cuts them in one controlled operation using remote control ensuring optimum operator safety.

These small light weight pumps provides total system portability. The pumps can be utilised to operate compression heads and other single acting tools. This system is proven reliable and accepted by power authorities and contractors Australia wide, with product service and spares support available Australia wide.

CR100EK- Earthing Kit for **DAIA #CR100** Remote Hydraulic Cutting Head

Refer page 62 for cutter details and page 105-107 for Pumps



CONNECT
EARTH CABLE
TO CR-100
HEAD

Model No. CR-100EK



EARTHING KIT CONTENTS

- 4 each of 1.5 metre braided copper flat palm earthing straps
- 1 each of 3.0 metre 70mm² Cu cable with heat shrink each end
- 2 each of 1.2 metre 70mm² Cu cables with heat shrink each end
- 4 each of earth clamps
- 3 each of 900mm long earth rods
- 1 each of earth rod driving head
- 3 each of roll springs
- 1 each of nylon carry bag
- 1 each protective blanket



SCAN ME